

TESTED TO COMPLY WITH



MEETS  
EN ISO:3059  
Specifications



# EDGE™ 13 SERIES

Compliant LED UV-A Flood Lamp

EDG-13HC

High-intensity **ASTM E3022-18** compliant broad-beam flood lamp for overhead nondestructive testing inspections.

**IP65  
RATED**



**Dust Tight &  
Water Resistant**



**NDT Inspection  
Booths**



**Screening of  
Fluorescent Particles**

### FLEXIBLE ARM

For mounting at specific angles

### EASILY MOUNTABLE

For overhead inspection or in-line applications

### FANLESS

Cool running design that uses state-of-the-art heat sinks

### GANGABLE

Can be ganged together to provide an even wider coverage area

### THERMAL CUT-OFF CIRCUITRY

Prevents lamp from going out of compliance when internal temperature exceeds specifications

### INTEGRAL UV-A PASS FILTERS

Reduce visible wavelengths

### LONG-LASTING UV-A LENSES


Virtually eliminate clouding/solarization

### 13 UV-A LEDS

Provides large area of coverage for the largest, most even overhead beam available



**CERTIFICATE OF  
CONFORMANCE**  
included with each lamp

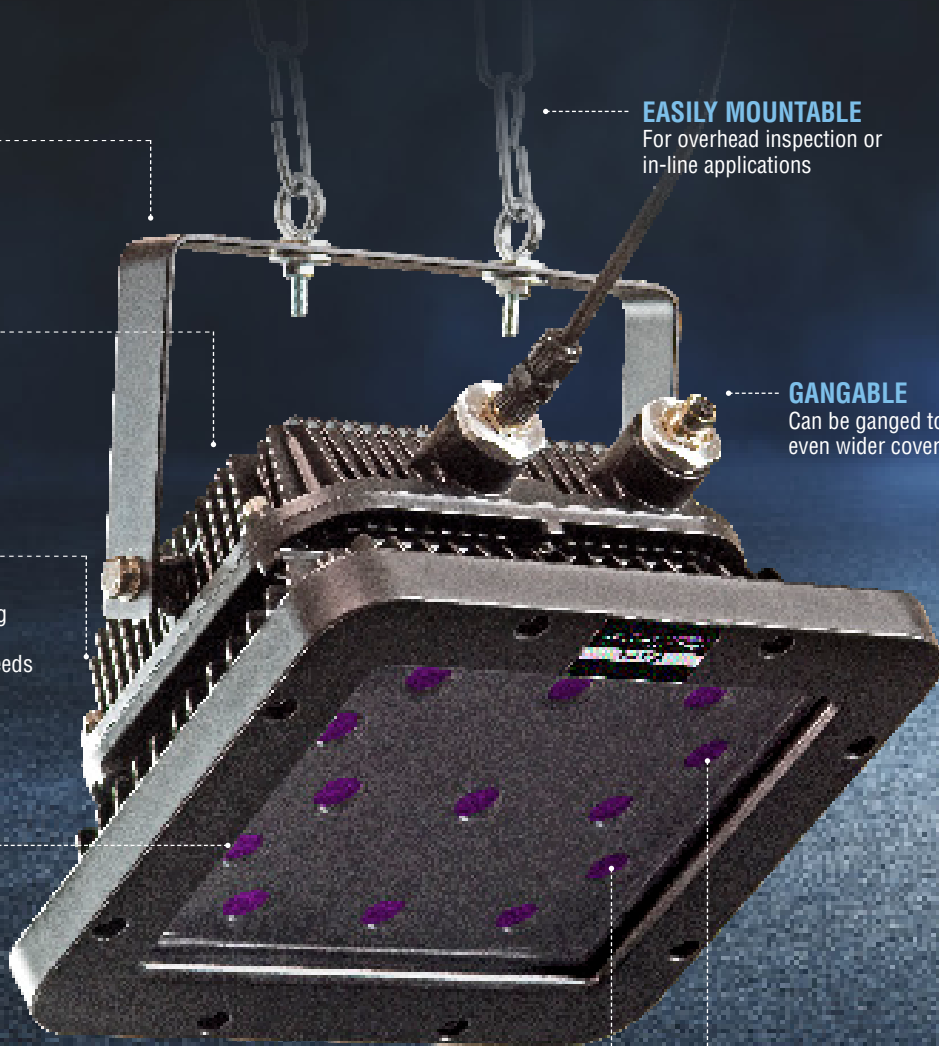

# EDGE™ 13 SERIES EDG-13HC

MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA (at minimum 1,000 μW/cm²)
EDG-13HC	8,500 μW/cm²	< 1 foot-candle (11 lux)	24 x 22 in (61 x 56 cm)

**Light Source:** (13) UV-A (365 nm) LEDs


**Lamp Style:** Panel flood lamp

**Length: (L x W x H)** 11 x 14 x 9 in (28 x 36 x 23 cm)

**Weight:** 14 lb (6.4 kg)

**Power Requirements:** AC power (main AC power cord supplied with the unit)  
(Available in 100-120V, 230V and 240V versions)


① UV-A intensity reading taken with the Spectroliner® AccuMAX™ Series meter, and are factory set to the values shown.

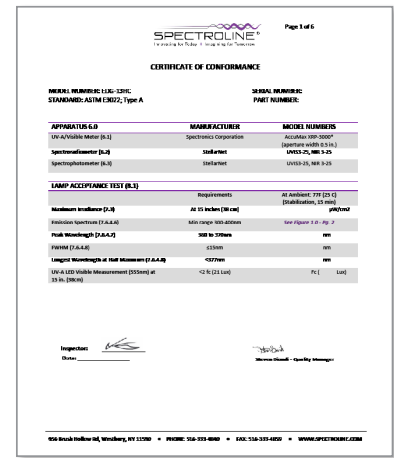

**CERTIFICATE OF CONFORMANCE**


For applications requiring extremely large coverage area, the EDGE™ 13 can be quickly ganged together.

\*Optional accessory: ganged cables with connectors (130156)

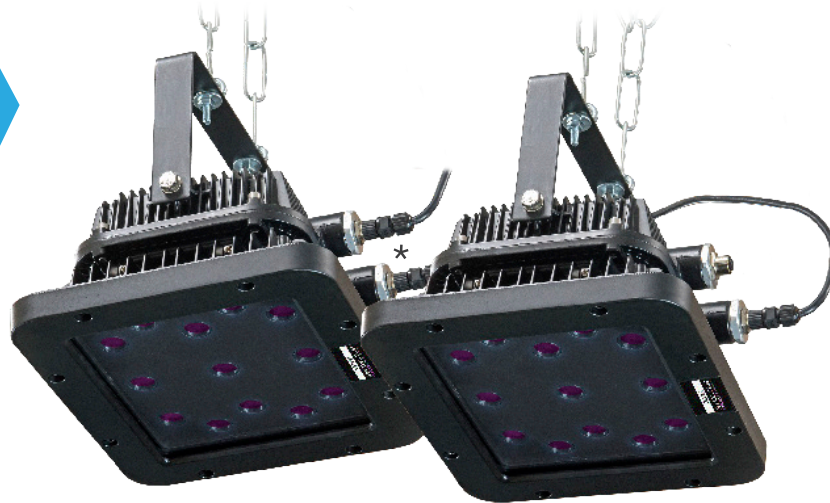


## UV-A Beam Profiles

Surface Contour Profile at 15 in (38 cm)

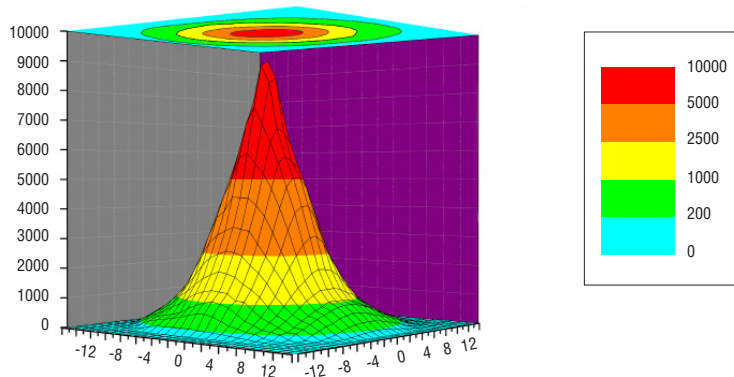

Top Intensity Profile at 15 in (38 cm)

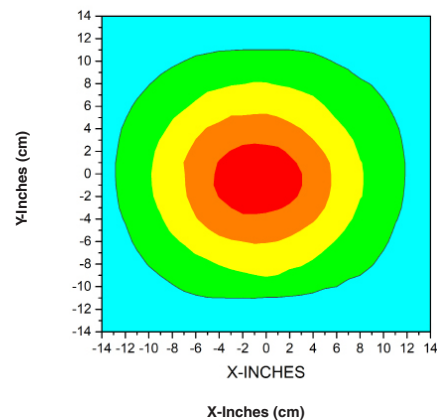

DISTRIBUTED BY:

**SPECTRO-UV**  
www.Spectro-UV.com  
4 Dubon Ct., Farmingdale, NY 11735  
866-230-7305

NDT  
6/22 A19016-3  
PRINTED IN USA